



Product Data Sheet

NeoCryl® B-890

NeoCryl® B-890 is a solid methacrylic copolymer which can be used in energy curable systems and in solvent based flexo inks. This resin shows excellent solubility in ethanol and in reactive diluents. It can be used in low residual odour printing inks and coatings.

Typical properties

Type	- modified MMA/BMA
Average Mol. weight (Mw)	- ± 12,500 Dalton
Viscosity, Brookfield 25°C 30% in HDDA	- ± 1300 mPa.s

Film properties

- Excellent pigment wetting properties
- Good adhesion to difficult substrates
- Low viscosity in ink formulation
- Low residual odour
- Improved outdoor durability when used in energy curable inks

Recommendations for end-use

- Energy curable flexo inks for enhanced adhesion
- Solvent based flexo inks for surface printing and laminating properties
- Grinding vehicle for energy curable printing inks

Formulating guidelines

- Complete solubility in ethanol
- Soluble in esters and ketones
- Soluble in various acrylate functional monomers, e.g. HDDA, TPGDA, DPGDA and TMPTA
- Compatible with NC, CAP, PVB and PU resins
- See our guidelines for specific information

Regulatory

- REACH (EU)
- TSCA (US)
- IECSC (China)
- AICS (Australia)
- PICCS (Philippines)
- ECL (Korea)

Delivery form: 100 % solid beads.

Product specifications

Property	Range	Unit	GAP
Appearance	Free flowing beads		0059
Total volatile	Max. 2.0	%	0025
Visc. Brookfield 25°C 30 % in ethanol/water 94/6	25 - 50	mPa.s	0020

Other product data

Property	Value	Unit	GAP
Density 20°C	± 1.15	kg/l	0006
Free monomer	Max. 3000	ppm	0118
Tg (DSC)	± 85	°C	1140
Acid value (on solid)	± 75	mgKOH/g	0095
OH value (on solid)	± 25	mgKOH/g	0091

Test methods

Test methods (GAP) referred to in the table(s) are available on request.

Storage guidelines

The resin should be stored indoors in original, unopened, undamaged container in a dry place at storage temperature between 5- 40 °C. Exposure to direct sunlight should be avoided.

Shelf life

Under above mentioned storage conditions, the shelf life of the resin will be 24 months ex work.

Material safety

A Material Safety Data Sheet for this product is available on request.

The user is held to check the quality, safety and other properties of the product referred to herein. The information and recommendations in this document are to the best of our knowledge, reliable. However, no rights whatsoever can be derived from this document or the information contained therein by any party, other than those expressly accepted by a selling entity of the Royal DSM group of companies ("DSM Selling Entity") in a binding sale and purchase agreement for product referred to herein. For the avoidance of doubt THE ROYAL DSM GROUP OF COMPANIES MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING THOSE OF MERCHANTABILITY AND FITNESS FOR PURPOSE. Unless explicitly agreed to otherwise in writing by the DSM Selling Entity, all offers, quotations, sales and deliveries of DSM products are subject to the General Conditions of Sale of such DSM Selling Entity.


This document has been issued by DSM Coating Resins on behalf of the DSM Selling Entity. For more information: www.dsmcoatingresins.com



Product Data Sheet

NeoCryl® B-890

Viscosity curve

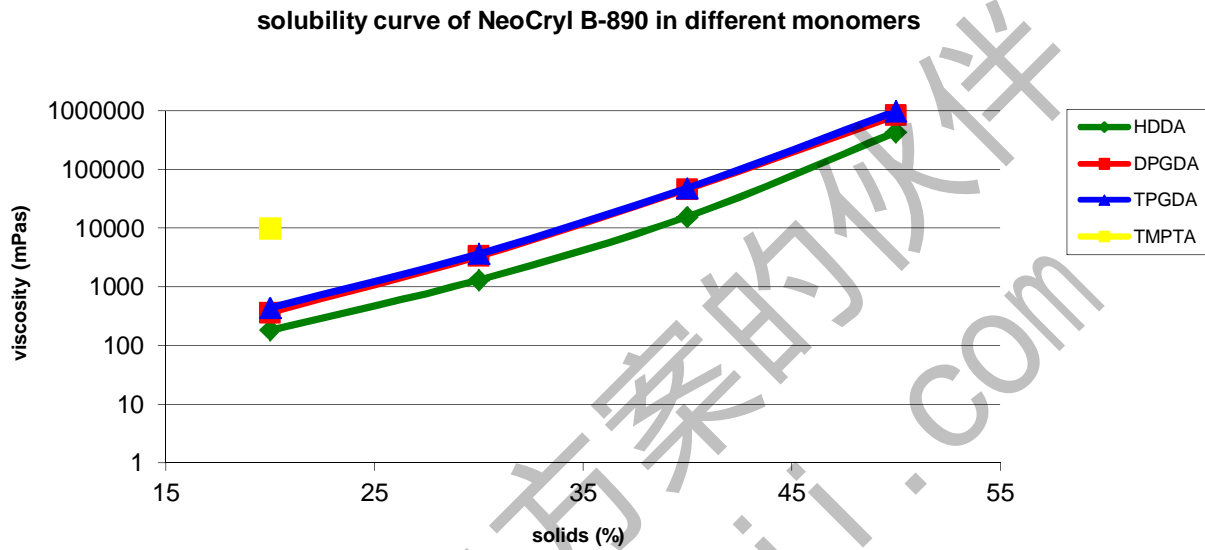

涂料解决方案案例的伙伴
www.uskeji.com

Date of issue: March 16 Version: 030093/3.1

The user is held to check the quality, safety and other properties of the product referred to herein. The information and recommendations in this document are to the best of our knowledge, reliable. However, no rights whatsoever can be derived from this document or the information contained therein by any party, other than those expressly accepted by a selling entity of the Royal DSM group of companies ("DSM Selling Entity") in a binding sale and purchase agreement for product referred to herein. For the avoidance of doubt THE ROYAL DSM GROUP OF COMPANIES MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING THOSE OF MERCHANTABILITY AND FITNESS FOR PURPOSE. Unless explicitly agreed to otherwise in writing by the DSM Selling Entity, all offers, quotations, sales and deliveries of DSM products are subject to the General Conditions of Sale of such DSM Selling Entity.

This document has been issued by DSM Coating Resins on behalf of the DSM Selling Entity. For more information: www.dsmcoatingresins.com